

# XTREME POWER CONVERSION C60

Standby UPS // 120VAC or 230VAC

For more information, visit [www.xpcc.com/c60](http://www.xpcc.com/c60)



## Compact power outage protection in compact tower form factor

The compact C60 is a single phase standby UPS designed to deliver power protection to small routers, switches, VoIP equipment, phone systems, and kiosks. A vital addition to any home office, it enables graceful shutdown of equipment during a longer power outage.

For standby applications requiring wall mounting, reference the XST at [www.xpcc.com/xst](http://www.xpcc.com/xst)

### PRODUCT SNAPSHOT

- › Available in North American 120VAC or International 230VAC
- › Compact size and lightweight design
- › Primary applications: home or small office, routers, switches, kiosks, and telecom closets
- › UL, FCC, RoHS compliant
- › 2 years electronics, 2 years battery warranty (USA and Canada)

### FEATURES

**Compact design**—lightweight UPS is ideal for kiosk applications

**Auto restart**—no need to be present after the outage

**Removable input power cord**—120V model includes 6 ft, IEC C13 to 5-15P input cord

**Cold start function**—UPS can start on batteries

**UL, FCC certifications**—insures safety and compatibility for all


**Ease of use**—plug and play functionality means the UPS is ready to start backing up your equipment right out of the box

**\$25,000 load protection policy**—protection against damaged connected equipment

# MODEL SELECTION GUIDE

For more information, visit [www.xpcc.com/c60](http://www.xpcc.com/c60)

MODEL NUMBER		C60-800	C60i-800
CAPACITY	Power rating	800VA (480W)	
INPUT	Nominal voltage	120VAC	230VAC
	Voltage range	80–135VAC ± 5%	175–254VAC
	Frequency range	55–65Hz at 60Hz ± 1Hz	45–55Hz at 50Hz ± 1Hz
	Surge protection	158 J	
	AC power cord	6 ft, IEC C13 to 5–15P	IEC C14 inlet only
OUTPUT	Voltage (line mode)	80–135VAC ± 5%	175–254VAC
	Voltage (battery mode)	120VAC ± 10%	230VAC ± 10%
	Voltage regulation	± 2%	
	Frequency (line mode)	55–65Hz at 60Hz ± 1Hz	45–55Hz at 50Hz ± 1Hz
	Frequency (battery mode)	60Hz ± 1Hz	50Hz ± 1Hz
	Waveform	Sine wave (normal), simulated sine wave (battery mode)	
	Transfer time	2–6 ms	
	Outlets	(2) NEMA 5–15R	(2) IEC C13
	Overload capacity	110% +20% / -10% for 5 min; 120% +20% / -10% immediately off	
	Efficiency	> 95%	
	BATTERY	UPS battery type	(1) 12V 9AH / 12VDC
UPS charge current		1A maximum	
Recharge time		8 hours to 90% capacity	
PHYSICAL	Dimensions (W x D x H)	4.0 x 13.0 x 5.7 in	
	Weight	7.5 lbs	
ENVIRONMENT	Temperature	32–104°F (0–40°C)	
	Humidity	0–90%	
	Altitude	11,500 ft above sea level	
INDICATORS & ALARMS	Line mode	Green LED illuminated	
	Battery mode	Green LED flashing every 10 sec	
	Battery low	Green LED flashing every 1 sec	
	Fault mode	Off	
	Audible alarm	Battery mode - every 10 sec; low battery - every 1 sec; overload - ever 0.5 sec; fault - constant alarm	
APPROVALS	UL 1778, FCC Class A, RoHS	S-Mark, EN62040-1, EN62040-2, RoHS	
WARRANTY	2 years electronics, 2 years battery (USA and Canada)		

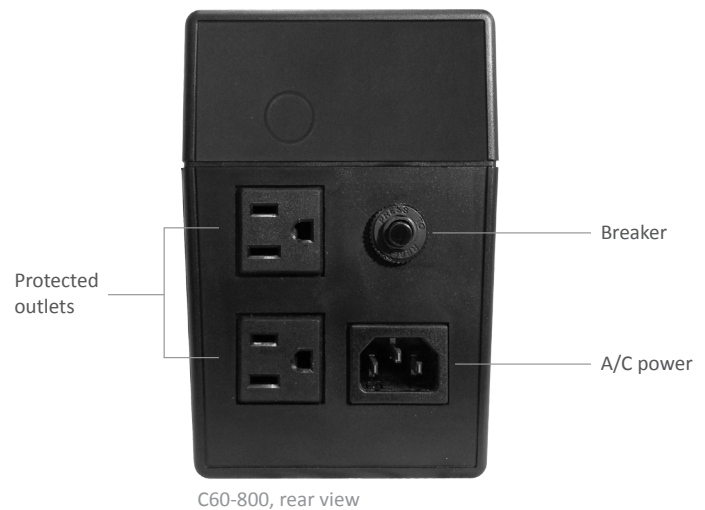

**XTREME**  
Power Conversion®

Protect your business.

XPC USA / Denver, CO / sales@xpcc.com

XPC EMEA / Rotterdam, NL / emea@xpcc.com

www.xpcc.com

©2015 Xtreme Power Conversion Corporation. All Rights Reserved. C60.01U (Rev 11/23/15)